


## MICRO IRT/C.4SV

### Product Overview

The Micro IRT/c.4SV features:

- Infrared Thermocouple IRT/c
- Non-contact
- Self-powered
- Intrinsically Safe
- Repeatability 0.02°F (0.01°C)
- Interchangeability ±1%
- Resolution approx. 0.0003°C
- Small Size

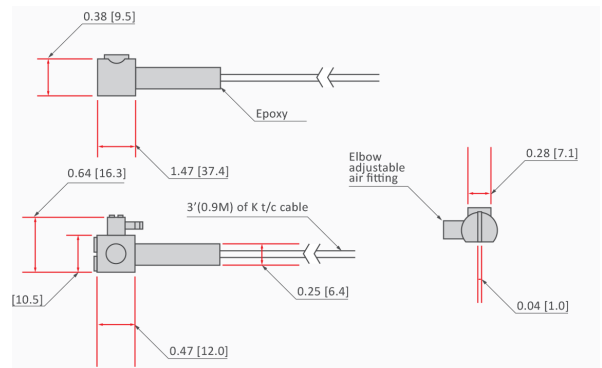


### Technical Data

Sensing Range	-49 to 1157°F (-45 to 625°C)	Response Time	60 Milleseconds
Ambient Temperature Range	-4 to 212°F (-20 to 100°C) with air off, -4 to 248°F (-20 to 120°C) with air on	Dimensions	See diagram above
Optimum Range Selection	One model: 2% linear to match a Kt/c from 212-240°C (see Temperature Selection Chart). For other temperature ranges please contact Exergen Global	Housing	Stainless Steel, Hermetically sealed, exceeds NEMA 4X, IP67
Field of View	approximately 4:1 (14°)	Cable	3 feet of unshielded, duplex insulated, type K, 24 AWG, PFA jacket rated to 500°F (260°C) (Shielded cable available upon request)
Minimum Spot Size	.1" (3mm)	Weight	Approximately 2oz. (60 grams) with cable
Spectral Response	5.5 to 20µm	Input Device Compatibility	It is recommended to use input devices with less than 1 nA of leakage current to minimize offsets, and sensor break detection should be set to 40 Kohm maximum.
Output Impedance	40 Kohms		

### Calibration

Ordering information **Micro IRT/c.4.SV-K-440F/220C**

Temperature Selection Chart

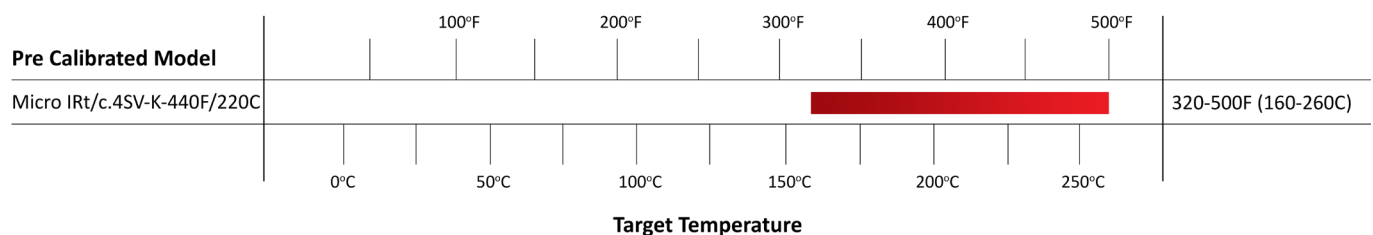

For other temperature ranges please contact Exergen Global

### Exergen Global offices:

The Netherlands  
 Pastoor Clercxstraat 26  
 5465 RH Veghel  
 Tel: +31 (0)413 376 599  
 Fax: +31 (0)413 379 310

USA  
 400 Pleasant Street  
 Watertown, MA 02472  
 Tel: +1 617 649 6322  
 Fax: +1 617 923 9911

Specifications subject to change without notice

office@exergenglobal.com  
 www.exergenglobal.com

DS-606-EN-V0